

Turning CARTwheels: An Alternating Algorithm for Mining Redescriptions

Deept Kumar[†], Naren Ramakrishnan^{†*}, Malcolm Potts[‡], and Richard F. Helm[‡]

[†]Department of Computer Science

[‡]Virginia Tech Center for Genomics, Fralin Biotechnology Center
Virginia Tech, Blacksburg, VA 24061, USA

*Contact: naren@cs.vt.edu

Abstract

We present an unusual algorithm involving classification trees where two trees are grown in opposite directions so that they are matched at their leaves. This approach finds application in a new data mining task we formulate, called *redescription mining*. A redescription is a shift-of-vocabulary, or a different way of communicating information about a given subset of data; the goal of redescription mining is to find subsets of data that afford multiple descriptions. We highlight the importance of this problem in domains such as bioinformatics, which exhibit an underlying richness and diversity of data descriptors (e.g., genes can be studied in a variety of ways). Our approach helps integrate multiple forms of characterizing datasets, situates the knowledge gained from one dataset in the context of others, and harnesses high-level abstractions for uncovering cryptic and subtle features of data. Algorithm design decisions, implementation details, and experimental results are presented.

1 Introduction

Classification and regression trees (CART) were among the earliest proposed approaches for pattern classification and data mining [4]. While being powerful in terms of accuracy and efficiency of induction, their results are also simple to understand as they mimic the decision-making logic of human experts. The renewed emphasis on data mining propagated by the knowledge discovery in databases (KDD) community in the early 1990s has fueled a resurgence of interest in tree-based methods. Researchers have revisited tree induction algorithms in the context of datasets residing in secondary storage [8, 10], creating scalable and highly efficient implementations [3]. The many fielded applications of tree-based methods range from everyday uses such as spam filtering [12] to astrophysical domains such as classifying galaxies [14].

In this paper we introduce a new data mining task—*redescription mining*—and also propose a novel tree-based algorithm (CARTwheels) for mining redescriptions. A redescription is a shift-of-vocabulary, or a different way of communicating information about a given subset of data; the goal of redescription mining is to find subsets of data that afford multiple descriptions.

Consider the set of all countries in the world. The elements of this set can be described in various ways, e.g., geographical location, political status, scientific capabilities, and economic prosperity. Such descriptors allow us to define various subsets of the given (universal) set. A redescription involves a subset definable in two ways, for instance:

‘Countries with > 200 Nobel prize winners’ $\Leftrightarrow$ ‘Countries with > 150 billionaires’

This redescription involves two descriptors, and says that the countries with more than 200 Nobel prize winners are also those countries with more than 150 billionaires. One country satisfies both descriptors, namely U.S.A., and we

say that it has been redescribed. The strength of the redescription is given by the symmetric Jaccard's coefficient, which is the ratio of the size of the intersection of two descriptors to the size of their union (in this case, $1/1 = 1$).

Descriptors on either side of a redescription can involve more than one entity, e.g.,

'Countries with defense budget > \$30 billion' $\Leftrightarrow$ 'Permanent members of U.N. Security Council'

This redescription is only approximate, however, since the left descriptor contains {U.S.A., U.K., Japan, France, Germany} and the right descriptor represents {U.S.A., U.K., Russia, France, China}. The Jaccard's coefficient is hence $3/7 = 0.428$.

To strengthen redescrptions such as above, we can use more selective descriptors:

'Countries with declared nuclear arsenals' $\Leftrightarrow$ 'Permanent members of U.N. Security Council'

which improves the Jaccard's coefficient to $5/8 = 0.625$ since the left descriptor now represents {U.S.A., U.K., Russia, France, China, India, Israel, Pakistan}. Another approach to strengthening is to form set-theoretic operations (union, intersection, difference) involving the given descriptors; e.g. the redescription

'Countries with defense budget > \$30 billion' $\cap$ 'Countries with declared nuclear arsenals' $\Leftrightarrow$
'Permanent members of U.N. Security Council' $-$ 'Countries with history of communism'

holds with Jaccard's coefficient 1. It refers to three countries: {U.S.A., U.K., France}.

The inputs to redescription mining are the universal set of objects O and two sets (X and Y) of subsets of O . The elements of X are the descriptors X_i , and are assumed to form a covering of O ($\bigcup_i X_i = O$). Similarly $\bigcup_i Y_i = O$. The only requirement of a descriptor is that it be a proper subset of O and denote some logical grouping of the underlying objects (for ease of interpretation). The goal of redescription mining is to find equivalence relationships of the form $E \Leftrightarrow F$ that hold at or above a given Jaccard's coefficient θ (i.e., $\frac{|E \cap F|}{|E \cup F|} \geq \theta$), where E and F are set-theoretic expressions involving X_i 's and Y_i 's, respectively. For tractability purposes, some syntactic bias on the allowable set-theoretic expressions or their length is assumed to be provided. For instance, we might restrict E to only involve intersections of two descriptors from X and F to either an intersection or difference of two descriptors from Y . Redescription mining hence involves constructive induction (the task of inventing new features) and exhibits traits of both unsupervised and supervised learning. It is unsupervised because it finds conceptual clusters underlying data, and it can be viewed as supervised because clusters defined using descriptors are given meaningful characterizations (in terms of other descriptors).

Why is this problem relevant? We posit that today's high-throughput data-driven sciences are drowning in not just the dimensionality of data, but also in the multitude of descriptors available for characterizing data. Consider gene expression studies using bioinformatics approaches. The universal set of genes in a given organism (O) can be studied in many ways, such as functional categorizations, expression level quantification using microarrays, protein interactions, and biological pathway involvement. Each of these methodologies provides a different vocabulary to define subsets of O (e.g., 'genes localized in cellular compartment nucleus,' 'genes up-expressed two-fold or more in heat stress,' 'genes encoding for proteins that form the Immunoglobulin complex,' and 'genes involved in glucose biosynthesis'). While traditionally we would custom-build data mining algorithms to work with each of these vocabularies, redescription mining provides a uniform way to characterize and analyze the results from any of them. In addition, it helps bridge diverse experimental methodologies by uniformly relating subsets across the corresponding vocabularies.

We further argue that redescription mining serves as a fundamental building block of many important steps in the iterative, often unarticulated, knowledge discovery process. A shift of vocabulary allows a given subset of data to be interpretable in a different context, and allows us to harness existing knowledge from this other context. For instance, if we are able to redescribe results from a new stress experiment onto, say, a heat shock experiment studied earlier, we will be able to study the new results in terms of known biological knowledge about heat shock. Chains of redescrptions allow us to relate diverse vocabularies, through important intermediaries.

Even redescrptions that hold with Jaccard’s coefficient < 1 find application in many domains. An approximate redescription implies a common meeting ground for two concerted communities of objects. A chain of such approximate redescrptions can effectively relate two subsets that have nothing in common! This is especially useful in *story telling* and *link analysis* applications. A query such as ‘what is the relationship between people traveling on Flight 847 and the top 10 wanted list by the FBI?’ can be posed in terms of redescription finding.

While related problems have been studied in the data mining community (most notably, conceptual clustering [6, 16], niche finding, and profiling classes [22]), we believe that the above formulation of redescription mining has not been attempted before. Our contributions here are both the introduction of this new data mining problem, as well as a novel tree-based algorithm for mining redescrptions.

2 Redescription Mining as Alternating Tree Induction

We now introduce an approach (CARTwheels) to mining redescrptions that involves growing two trees in opposite directions, so that they are matched at their leaves. The decision conditions in the first tree (say, top) are based on set membership checks in entries from X and the bottom tree is based on membership checks in entries from Y ; thus matching of leaves corresponds to a potential redescription. This idea hence uses paths in the classification trees as representations of boolean expressions involving the descriptors.

The CARTwheels algorithm is an alternating algorithm, in that the top tree is initially fixed and the bottom tree is grown to match it. Next, the bottom tree is fixed, and the top tree is re-grown. This process continues, spouting redescrptions along the way, until designated stopping criteria are met.

2.1 Working Example

For ease of illustration, consider the artificial example in Fig. 1 that shows two sets of descriptors for the universal set $O = \{o_1, o_2, o_3, o_4, o_5\}$. Here, the set X corresponds to the set of descriptors $\{X_1, X_2, X_3, X_4\}$ and Y corresponds to $\{Y_1, Y_2, Y_3, Y_4\}$. The cardinalities of X and Y may not be the same in the general case. Further, in a realistic application, the number of descriptors would far exceed the number of objects.

To initialize the CARTwheels alternation, we prepare a traditional dataset for classification tree induction, where the entries correspond to the objects, the boolean features are derived from one of X or Y , and the classes are derived from the other. In the dataset shown in Fig. 2 (left), the features correspond to set membership in entries of Y and each object is assigned a *unique* class, chosen from the X_i ’s it participates in. We employed a greedy set covering of the objects using the entries of X in order to establish the class labels in Fig. 2 (left). For instance, o_2 belongs to both X_1 and X_3 , but the tie is broken in favor of X_1 . Notice that in this process, X_3 does not receive any representation in the prepared dataset.

A classification tree can now be grown using any of the impurity measures studied in the literature (e.g., entropy, Gini index, misclassification rate). Fig. 2 (right) depicts a possible tree. The leaves of the tree deterministically predict a class label from X , typically the majority class. At this point, the specific details of how the tree was induced are not important, only that any such tree will induce a partition of the underlying objects. In this case, the tree induces a 3-partition which mirrors the 3-class partition present in the original dataset, but is not exactly the same. The left most path corresponds to the region $Y_3 \cap Y_2$, the right most path corresponds to $O - Y_3 - Y_1$, and the union of the two middle paths gives $(Y_3 - Y_2) \cup (Y_1 - Y_3)$. The reader can verify that these regions do not have a one-to-one correspondence with the regions X_1 , X_2 , and X_4 in the original partition. For instance, only X_2 enjoys such a correspondence, with $O - Y_3 - Y_1$. In ‘reading off’ a partition from a tree in this manner, a conjunction thus results from a path of length > 1 , a disjunction results from multiple paths predicting the same class, with negations corresponding to following the ‘no’ branch from a given node. This partition is used as the starting point for the alternation (Fig. 4, first frame).

$$\begin{aligned}
X_1 &= \{ o_2, o_3 \} & Y_1 &= \{ o_1, o_2 \} \\
X_2 &= \{ o_3, o_4 \} & Y_2 &= \{ o_2, o_3, o_4 \} \\
X_3 &= \{ o_2, o_4 \} & Y_3 &= \{ o_3, o_5 \} \\
X_4 &= \{ o_1, o_5 \} & Y_4 &= \{ o_1, o_2, o_5 \}
\end{aligned}$$

Figure 1: Example data for illustrating operation of CARTwheels algorithm.

object	Y_1	Y_2	Y_3	Y_4	class
o_1	✓	×	×	✓	X_4
o_2	✓	✓	×	✓	X_1
o_3	×	✓	✓	×	X_1
o_4	×	✓	×	×	X_2
o_5	×	×	✓	✓	X_4




Figure 2: (left) Dataset to initialize CARTwheels algorithm. (right) induced classification tree.

obj.	X_1	X_2	X_3	X_4	class
o_1	×	×	×	✓	$(Y_3 - Y_2) \cup (Y_1 - Y_3)$
o_2	✓	×	✓	×	$(Y_3 - Y_2) \cup (Y_1 - Y_3)$
o_3	✓	✓	×	×	$Y_3 \cap Y_2$
o_4	×	✓	✓	×	$O - Y_3 - Y_1$
o_5	×	×	×	✓	$(Y_3 - Y_2) \cup (Y_1 - Y_3)$

obj.	Y_1	Y_2	Y_3	Y_4	class
o_1	✓	×	×	✓	$(X_3 \cap X_1) \cup (X_4 - X_3)$
o_2	✓	✓	×	✓	$(X_3 \cap X_1) \cup (X_4 - X_3)$
o_3	×	✓	✓	×	$(O - X_3 - X_4)$
o_4	×	✓	×	×	$(X_3 - X_1)$
o_5	×	×	✓	✓	$(X_3 \cap X_1) \cup (X_4 - X_3)$

Figure 3: (left) Dataset for second iteration of CARTwheels algorithm. Notice that class labels are now set-theoretic expressions involving Y_i 's. (right) Dataset for third iteration of CARTwheels algorithm.

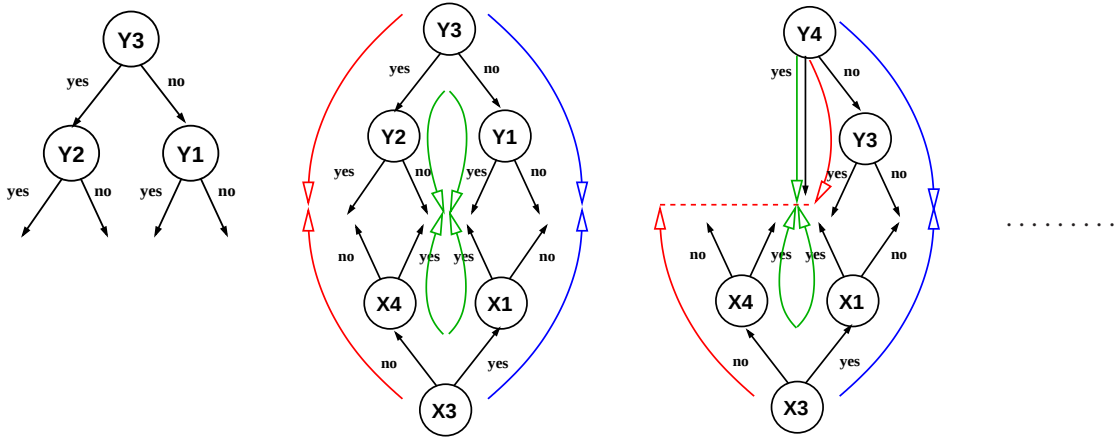


Figure 4: Alternating tree growing in the CARTwheels algorithm. The alternation begins with a tree (first frame) defining set-theoretic expressions to be matched. The bottom tree is then grown to match the top tree (second frame), which is then fixed, and the top tree is re-grown (third frame). Colored arrows indicate the matching paths. Redescriptions corresponding to matching paths at every stage are read off and subjected to evaluation by Jaccard's coefficient.

We now prepare a dataset with entries from X as the features and the regions thus formed (involving Y_i 's) as the classes, as shown in Fig. 3 (left). Inducing a classification tree from this dataset really corresponds to growing a second tree to match the first tree at the leaves, as depicted in Fig. 4 (second frame). In this case, the second tree also learns a 3-partition and we can evaluate each of these matchings using the Jaccard's measure. This produces three redescrptions:

$$\begin{aligned}(X_3 \cap X_1) \cup (X_4 - X_3) &\Leftrightarrow (Y_3 - Y_2) \cup (Y_1 - Y_3) \\ (X_3 - X_1) &\Leftrightarrow (O - Y_3 - Y_1) \\ (O - X_3 - X_4) &\Leftrightarrow (Y_3 \cap Y_2)\end{aligned}$$

all of which hold at Jaccard's coefficient 1. This need not be the case in general. The bottom tree might be able to match only some paths in the top tree, or the matches might not pass our Jaccard's cutoff. This process is then continued, now with Y_i 's as features and the partitions derived from the bottom tree as classes (see right of Fig. 3). The new matchings yield the redescrptions:

$$\begin{aligned}(X_3 \cap X_1) \cup (X_4 - X_3) &\Leftrightarrow Y_4 \\ (O - X_3 - X_4) &\Leftrightarrow (Y_3 - Y_4) \\ (X_3 - X_1) &\Leftrightarrow (O - Y_3 - Y_4)\end{aligned}$$

which, fortuitously, also have a Jaccard's coefficient of 1. Notice that, this time, the root decision node that has been picked is Y_4 (see third frame of Fig. 4) and the tree actually resembles a *decision list* (a tree where every internal node has a leaf on its 'yes' branch). The alternation can be continued (see next section for ways to configure the search).

If we limit the size of the trees at every iteration, it is easy to see that the set-expressions constructed cannot get arbitrarily long. In our running example, we use a depth limit of 2 so that all expressions on either side of a mined redescription can involve at most three descriptors. The longest expressions result from unions of two paths involving different subtrees.

2.2 The CARTwheels Algorithmic Framework

Why does CARTwheels work? The use of trees to mine one-directional implications (rules) is well understood and is the idea behind algorithms such as C4.5 [19]. In CARTwheels, we exploit the duality between *class partitions* and *path partitions* to posit the stronger notion of equivalence. In fact, if a tree reduces the entropy to zero, it is clear that there must be a one-to-one correspondence between its path partitions and class partitions, which are really path partitions from the other tree. Keep in mind that different paths are union-ed when they predict the same class, and this property is crucial to establishing the duality.

The search for redescrptions in CARTwheels can be viewed as a problem of identifying (and creating) correlated random variables. A descriptor, e.g., D , can be considered to be a discrete random variable that takes on values from O . Every object in D occurs with probability $\frac{1}{|D|}$ and other objects occur with probability zero, to yield total probability mass of 1. Notice that this makes the self entropy of such a random variable to be the logarithm of the size of the descriptor. Now consider running a CARTwheels alternation with a depth limit of 1 for the classification trees. Mining a redescription with Jaccard's coefficient of 1 means that we have identified a random variable D' whose *entropy distance* from D is zero. The entropy distance [15] is given by:

$$H(D, D') - I(D; D')$$

where $H(D, D')$ is the joint entropy function of $\{D, D'\}$ and I qualifies the mutual information, in turn given by:

$$I(D; D') = H(D) - H(D|D')$$

where $H(D)$ is the self-entropy of D and $H(D|D')$ is the conditional entropy of D given D' . In other words, the average reduction in uncertainty about D due to knowing D' is exactly the self entropy of D , causing an entropy distance of 0. Entropy distance is a true distance measure, unlike measures such as the Kullback-Leibler (KL) divergence. Smaller values of entropy distance hence imply higher values of Jaccard’s coefficient.

When we increase the depth limit, the analysis gets complicated because the redescription mining problem as stated is severely underconstrained. Any successful algorithm is required to arrive at both the set theoretic expressions as well as test them for equivalence. The growing of classification trees with boolean features multiplexes the steps of constructive induction and guarantees implication, while the duality of partitions helps set the stage for equivalence testing. Ideally we would like to exercise precise control over the sequence in which the algorithm explores options, in order to qualify the nature of the mined redescrptions.

2.2.1 Modeling CARTwheels Alternation

Towards this end, the operation of CARTwheels can be modeled as a Markov process since the choice of next state is a function of only the current state (and perhaps global information such as O , X , and Y). This means that we can reduce the search for potential redescrptions to the design of a suitable state exploration policy.

What does ‘state’ mean in modeling the operation of CARTwheels? Refer back to the duality of path partitions and class partitions – either of them could be used as a representation of state. The representation can be given as a label vector employing some canonical ordering of the objects in O (to ensure uniqueness). In addition, we have the option of including the descriptors for these partitions (in terms of X_i ’s or Y_i ’s) as part of the state representation. This is important when the same partition is realized by different descriptors, but must be considered distinct for redescription mining purposes (a simple example arises when X or Y have elements that are exactly the same). We employ this approach in our studies.

2.2.2 Designing an Exploration Policy

Once the representational issue is decided, the more fundamental question pertains to the design of a suitable exploration policy. In contrast to traditional classification tree induction which is motivated at *reducing* entropy, CARTwheels must actually *maintain* entropy in some form, since impurity drives exploration.

Should CARTwheels attempt to find *all* redescrptions? This is clearly a tall order, and is reminiscent of the difficulties encountered in association rule mining [1], where the number of rules generated can quickly become unwieldy. Attempting to do this in the CARTwheels framework is unappealing since every set expression postulated by one tree must be matched by every expression modelable in the other tree! This will require multiple visitations of the same state and, while we can interleave the testings for matches to a certain extent, would involve enormous overhead in book-keeping. Instead we can exploit the algebraic structure of the problem to identify a minimal generating set of redescrptions, and design the policy to only visit the relevant states for this purpose. This is similar to the strategy pursued by Zaki for mining a non-redundant set of association rules [24]. How this can be done effectively for redescrptions is the topic of a future paper.

A second approach forsakes the desire to explore all redescrptions, and instead exploits the property that a redescription can be viewed as a subset of $O \times O$ space, i.e., a binary relation on O . Here, instead of computing all possible equivalences, we only find enough redescrptions to cover this space a specified number of times. We have to be careful here because redescrptions occur in two flavors. A redescription with Jaccard’s coefficient 1 is a strong one, and has a *complementary redescription*—with both left side and right side expressions negated—that will also be strong. A redescription with Jaccard’s coefficient < 1 is approximate and might hold in only one complement. For instance, if both sides of the redescription cover, say, 90% of the objects in O , then a very high Jaccard’s coefficient can result purely by chance! Needless to say, the complementary redescription involving the remaining 10% of the objects may not hold. The net effect is that some redescrptions might imply a complete cover of $O \times O$ space, whereas others will only cover subsets. A workable criterion of coverage hence requires careful study.

In this paper, we employ a simpler exploration policy where descriptors participating in a path (but not the leaf) and yielding a good redescription are removed from consideration in subsequent alternations. In experimental tests, we have observed that this greedy policy guarantees a rapid exhaustion of the sets X and Y . We also place a limit on the number of alternations that the algorithm can pass through without finding any redescrptions. Once this limit is exceeded (happens after many useful entries from X and Y have been deleted), the algorithm terminates.

CARTwheels also employs randomization heuristics to facilitate state exploration. For instance, when assigning class labels after inducing a tree, we take care to ensure that the same label is not assigned to all leaves, and suitably randomize assignments toward this purpose. This might appear counter-intuitive, but notice that it only has the effect of re-organizing the partitions derived from the paths, and can be seen as buying time for the Markov chain. Another example pertains to how decision nodes are selected for inclusion in a tree. While we use entropy as the primary driver for tree induction, we sometimes perform randomized moves at the root level, in order to prevent over-dominance of one descriptor in the ensuing redescrptions.

2.3 Implementation Details

CARTwheels is implemented in C++ atop a Postgres database providing access to the descriptors. We use an AD-tree data structure [17] for fast counting purposes and estimation of entropy (this is distinct from the classification tree that combines the descriptors). The AD-tree provides access to the distributions of ‘class labels’ for every combination of ‘features’ and, since the definition of features and class labels change at every iteration, is rebuilt continually. Notice that the data structure is expected to provide both the sizes of descriptors as well as their negations (when we follow the ‘no’ branch) and hence, the depth of the AD-tree is set to just greater than the allowable depth of the classification trees. The CARTwheels algorithm consults the AD-tree whenever it must make a choice of a decision node (except when its move is exploratory). After evaluating matchings, set-expressions read off the trees are subjected to tabular minimization, in order to arrive at a canonical form.

The implementation allows for configuring the space of redescrptions that are explored. The depth limit for the top and bottom trees can be individually specified, and we can also preferentially include or exclude certain types of expressions in mined redescrptions. For instance, syntactic constraints on redescrptions (e.g., only conjunctions are allowed) can be incorporated as biases in the tree construction phase of CARTwheels.

3 Applications in Bioinformatics

We now present an application of CARTwheels to studying gene expression datasets from microarray experiments conducted on the budding yeast *Saccharomyces cerevisiae*. Bioinformatics is fertile ground for application of CARTwheels and *S. cerevisiae* is arguably the most well studied (and documented) model organism through bioinformatics techniques. Practically every experimental methodology applied towards yeast can be viewed as a way to define descriptors. Even the results of other data analysis/mining algorithms can be used as a source of descriptors! The underlying universal set of objects could be initialized to the set of genes, proteins, or processes, in *S. cerevisiae*. CARTwheels hence brings many computational and experimental technologies to bear upon redescription mining. It supports the capture of both similarities and distinctions among descriptors derived from these diverse sources.

The redescription process begins by defining an universal set of genes O , which is dependent on our biological goals. Here, we are interested in characterizing similarities and differences in yeast gene expression behavior across related families of stresses. Gasch et al. [9] is an important source for such a study since it provides results from more than 170 comparisons, across a variety of environmental stresses. We selected five stresses from this dataset (heat shock from 25°C to 37°C, hyper-osmotic shock, hypo-osmotic shock, H_2O_2 exposure, and mild heat shock at variable osmolarity) and initialized O to be the set of genes that show significant expression (more than 1-fold up- or down-expression) in some time point in each of these stresses. This results in a set of 74 genes/ORFs.

The choice of the universal set can be viewed as a conditioning context and must be kept in mind when interpreting any mined redescrptions. It can be viewed as an implicit descriptor occurring on both sides of every redescription, e.g., $E \Leftrightarrow F$ in O can be viewed as $E \cap O \Leftrightarrow F \cap O$.

We defined 824 descriptors, in a variety of ways. One class of descriptors was derived from categories in the GO biological process, GO cellular component, and GO molecular function taxonomies, that have representation among the chosen 74 genes. This yields a total of 378 descriptors (210 GO BIO + 42 GO CELL + 126 GO MOL). The microarray results from the five stresses of Gasch et al. [9] were bucketed to yield range descriptors of the form ‘expression level $\in$ [%x, 0] in time point %y of stress experiment %z’ (for negative %x) and ‘expression level $\in$ [0, %x] in time point %y of stress experiment %z’ (for positive %x). This produces 224 descriptors. Further, k-means clustering was performed using the Genesis software suite [21] on each of the stresses individually, with a setting of 10 clusters. Since heat shock and mild heat shock at variable osmolarity are actually pairs of experiments, this step yields $(5+2) \times 10 = 70$ descriptors depicting clusters of genes with similar time profiles. Finally, we included microarray results from a histone depletion experiment conducted by Wyrick et al. [23] and created 152 range descriptors similar to the Gasch stresses; this is to allow us to relate the effect of histone depletion to that of environmental stresses.

To invoke CARTwheels, we initialized X to be all descriptors derived from the Gasch et al. dataset (which includes the range descriptors as well as the k-means clusters). This ensures that all redescrptions will involve some aspect of the Gasch et al. experiment and prevents the possibility of, say, mining a redescription between two GO taxonomies. Y was initialized to the set of all descriptors; thus, there is some overlap between X and Y . In order to prevent obvious redescrptions arising from this overlap, the algorithm was precluded from utilizing descriptors in one tree if they are already present in the other tree.

We employed a Jaccard’s threshold of 0.5 and a depth-limit of 2 in both the top and bottom tree induction alternations. The limit on the number of allowable alternations till a redescription is mined is set to 10. Redescrptions inferred from CARTwheels are required to hold in both the mined and complementary forms. For example, for the equivalence $E_1 \cup E_2 \Leftrightarrow F$ to be considered as a redescription, it must hold with Jaccard’s coefficient at least 0.5, as must its complement: $\neg E_1 \cap \neg E_2 \Leftrightarrow \neg F$. This ensures that every redescription truly induces a partition of O . Thus whetted, redescrptions are then subjected to a ‘tightening’ step, akin to rule pruning in packages like C4.5. This might involve attempting to drop terms from both sides of the redescription, or restricting range descriptors (if they occur in the redescription), and determining whether this causes significant degradation of Jaccard’s coefficient. If no degradation is observed, then the redescription can be tightened. With these design choices, and the greedy exploration policy, CARTwheels terminates after using 150 of the 824 descriptors, yielding about 200 redescrptions.

Seven key mined redescrptions (R1–R7) are depicted in Fig. 5. They were selected for both their biological interest as well as for their feature construction novelties. R1 is a redescription between the GO taxonomy and experimental stresses from the Gasch dataset, and involves two genes. The rectangular region on the right side is bounded by the extremal values specific to the experiment, and hence is captured by a conjunction of merely two descriptors. From a biological perspective, R1 is interesting because it relates *contrasting* behavior in two different experimental comparisons (positive in heat shock 10 minutes, and negative in hypo-osmotic shock) to a GO biological category related to stress.

R2 is actually a chain of two redescrptions, mined in successive iterations of CARTwheels. This redescription involves 11 genes and relates the disjunction of two different GO biological categories to expression data across three different stresses (this time, all involving positive expression). Notice that one of the derived expression descriptors is also a disjunction. It is pertinent to note that R2 experienced some tightening of its range descriptors – this is why one of its expressions has an extra term than would be expected for a 2-level tree.

R3 satisfies our curiosity about the similarity between the histone depletion experiment and a Gasch comparison (heat shock). It involves 7 genes, two of which are hypothetical and one with a putative annotation. Such redescrptions involving un-annotated genes are important for suggesting testable hypotheses about their functionality.

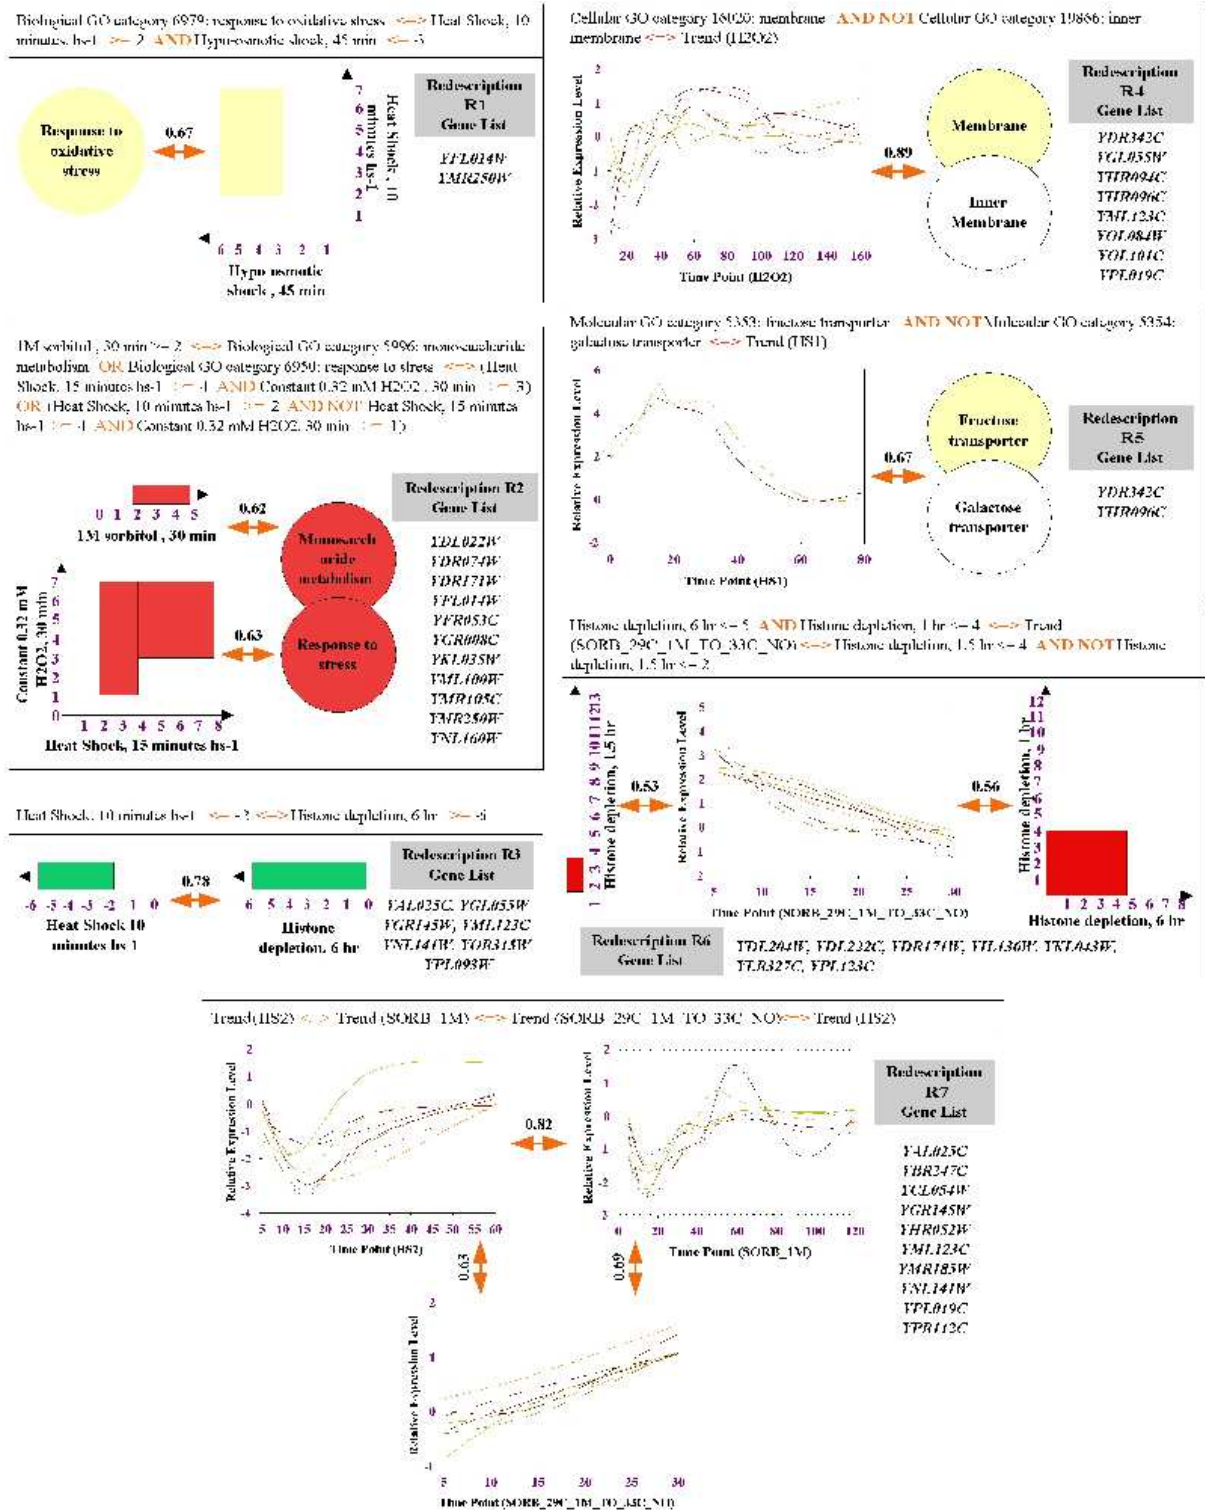


Figure 5: Seven redescrptions mined from gene expression studies on *Saccharomyces cerevisiae*. Each box gives a readable statement of the redescription, presents it in graphical form, and identifies the genes conforming to the redescription. The Jaccard's coefficient is displayed over the redescription arrow. Notice that some redescrptions (e.g., R1, R5) involve only two genes, whereas others such as R2 involve larger numbers.

The remaining redescrptions involve cluster profiles on one or both sides. R4 relates a k-means cluster to a set difference of two *related* GO cellular component categories. Interestingly, two of the genes participating in this redescription (YDR342C and YHR096C) are singled out by the next redescription (R5), which identifies a different k-means cluster to characterize these genes; and which also uses a set-difference, this time of related GO molecular function categories.

R6 is another chain of redescrptions, similar to R2, and relates a particular trend in the Gasch dataset to positively expressed genes in three different time points of the histone experiment. It involves 7 genes. Finally, R7 is actually a triangle of redescription relationships that illustrates the power of CARTwheels. Three different experimental comparisons are involved in this circular chain of redescrptions, with 10 genes being implicated in all three descriptors. From a biological standpoint, this is a very interesting result – the common genes indicate concerted participation across stress conditions; whereas the genes participating in, say, two of the descriptors, but not the third, suggest a careful diversification of functionality.

4 Discussion

This paper is a first exploration into the formulation of the redescription mining problem and has presented an approach for mining redescrptions automatically. Redescrptions can be thought of as generalizations of one-directional implications (e.g., association rules [1], rules in ILP [18]), where one descriptor is required to be a proper subset of the other. This generalization coupled with the automatic identification of set-theoretic constructions makes CARTwheels a very powerful approach to mining (approximate) equivalence relations. We have demonstrated the effectiveness of CARTwheels in a domain that exhibits a richness of descriptors, and shown how it captures patterns involving small as well as large sets of objects.

The work presented here can be considered a significant extension of ideas pursued in the schema matching [20], clustering categorical data [7], and model management [2] literature. The relationships considered in schema matching research are primarily of the foreign key nature or otherwise operate at the instance level, whereas we consider more complex set-theoretic relationships. Clustering categorical data focuses on defining similarity measures in non-metric spaces and this research can be fruitfully integrated with our work. However, notice that we are not merely clustering data but also imposing describability constraints. Model management is a framework that recognizes the complex inter-relationships that would exist in multi-database enterprises and provides union, intersection, and difference operators for reconciliation, integration, and migration purposes. The relationships here are assumed to be user provided, and the emphasis is on actually ‘executing a redescription.’ CARTwheels can thus be usefully employed here as a driver for determining what these relationships should be.

We now outline some directions for future research. The connection between Jaccard’s coefficient and algorithmic driver parameters (such as entropy) deserves further study. Other ways of evaluating redescrptions [11, 13] are also pertinent here (e.g., Dice coefficient) and some of these could support more efficient tree-based algorithms than the Jaccard’s coefficient. Ideally, an evaluation metric would obey some closure properties in the space of redescrptions, which can be used to configure an exploration strategy. In addition, it is preferable that an evaluation metric lends itself to the design of a statistical test of significance for redescrptions.

Thus far, we have assumed a ‘flat’ organization of the given descriptors and do not recognize any structural relationships between them. However, some descriptor vocabularies (e.g., derived from GO) enjoy a hierarchical structure, which can be exploited by the mining algorithm. Specialized redescription algorithms can thus be designed for targeted descriptor families.

There is an intrinsic limit to a dataset’s potential to reveal redescrptions, which can be studied through statistical analysis of set size distributions and estimates of overlap potential. Of particular interest here is qualifying the ‘expected’ results from a CARTwheels alternation before actually performing the alternation; the *entropy rate* of the stochastic process underlying the Markov chain [5] can be a useful indicator in this regard.

Our current focus is on using redescrptions to automatically span multiple levels of abstraction (e.g., gene subsets → pathways → biological processes). This would firmly establish the importance of redescription in bridging the diverse levels at which information is created and characterized.

Acknowledgements

This work is supported through the Multidisciplinary University Research Initiative (MURI) program of the Department of Defense (Biomimetic Cell and Tissue Stasis; N00014-01-1-0852), the Metabolic Engineering for Cellular Stasis program of DARPA (N00173-98-1-G005-P00004 and N00173-02-1-G016), and the National Science Foundation (Next Generation Software program; grants EIA-9984317 and EIA-0103660). We thank Bud Mishra, Chris Bailey-Kellogg, and T.M. Murali for critically reading the manuscript and providing useful comments.

References

- [1] R. Agrawal and R. Srikant. Fast Algorithms for Mining Association Rules in Large Databases. In *Proceedings of the 20th International Conference on Very Large Data Bases (VLDB'94)*, pages 487–499. Morgan Kaufmann, Sep 1994. Santiago de Chile, Chile.
- [2] P.A. Bernstein, R. Pottinger, and A.Y. Halevy. A Vision for Management of Complex Models. *SIGMOD Record*, Vol. 29(4):pages 55–63, Dec 2000.
- [3] J.S. Bradley, J. Gehrke, R. Ramakrishnan, and R. Srikant. Scaling Mining Algorithms to Large Databases. *Communications of the ACM*, Vol. 45(8):pages 38–43, Aug 2002.
- [4] L. Breiman, J.H. Friedman, R.A. Olshen, and C.J. Stone. *Classification and Regression Trees*. Chapman and Hall/CRC, 1984.
- [5] T.M. Cover and J.A. Thomas. *Elements of Information Theory*. John Wiley and Sons: Series in Telecommunications, 1991.
- [6] D.H. Fisher. Knowledge Acquisition via Incremental Conceptual Clustering. *Machine Learning*, Vol. 2(2):pages 139–172, 1987.
- [7] V. Ganti, J. Gehrke, and R. Ramakrishnan. CACTUS: Clustering Categorical Data using Summaries. In *Proceedings of the Fifth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD'99)*, pages 73–83. ACM Press, Aug 1999. San Diego, CA.
- [8] V. Ganti, J. Gehrke, and R. Ramakrishnan. Mining Very Large Databases. *IEEE Computer*, Vol. 32(8):pages 38–45, Aug 1999.
- [9] A.P. Gasch, P.T. Spellman, C.M. Kao, O. Carmel-Harel, M.B. Eisen, G. Storz, D. Botstein, and P.O. Brown. Genomic Expression Programs in the Response of Yeast Cells to Environmental Changes. *Molecular Biology of the Cell*, Vol. 11:pages 4241–4257, 2000.
- [10] J. Gehrke, R. Ramakrishnan, and V. Ganti. RainForest: A Framework for Fast Decision Tree Construction of Large Datasets. *Data Mining and Knowledge Discovery*, Vol. 4(2/3):pages 127–162, July 2000.
- [11] J.C. Gower and P. Legendre. Metric and Euclidean Properties of Dissimilarity Coefficients. *Journal of Classification*, Vol. 3:pages 5–48, 1986.

- [12] T. Hastie, R. Tibshirani, and J. Friedman. *The Elements of Statistical Learning: Data Mining, Inference, and Prediction*. Springer, 2001.
- [13] W.P. Jones and G.W. Furnas. Pictures of Relevance: A Geometric Analysis of Similarity Measures. *Journal of the American Society for Information Science*, Vol. 38(6):pages 420–442, 1987.
- [14] C. Kamath, E. Cantu-Paz, I.K. Fodor, and N.A. Tang. Classifying Bent-Double Galaxies. *IEEE/AiP Computing in Science and Engineering (CiSE)*, Vol. 4(4):pages 52–60, Jul/Aug 2002.
- [15] D.J.C. MacKay. *Information Theory, Inference, and Learning Algorithms*. Cambridge University Press, 2003.
- [16] R.S. Michalski. Knowledge Acquisition through Conceptual Clustering: A Theoretical Framework and Algorithm for Partitioning Data into Conjunctive Concepts. *International Journal of Policy Analysis and Information Systems*, Vol. 4:pages 219–243, 1980.
- [17] A.W. Moore and M.S. Lee. Cached Sufficient Statistics for Efficient Machine Learning with Large Datasets. *Journal of Artificial Intelligence Research*, Vol. 8:pages 67–91, 1998.
- [18] S. Muggleton. Scientific Knowledge Discovery using Inductive Logic Programming. *Communications of the ACM*, Vol. 42(11):pages 42–46, Nov 1999.
- [19] J.R. Quinlan. *C4.5: Programs for Machine Learning*. Morgan Kaufmann, 1993.
- [20] E. Rahm and P.A. Bernstein. A Survey of Approaches to Automatic Schema Matching. *VLDB Journal*, Vol. 10(4):pages 334–350, 2001.
- [21] A. Sturn, J. Quackenbush, and Z. Trajanoski. Genesis: Cluster Analysis of Microarray Data. *Bioinformatics*, Vol. 18(1):pages 207–208, 2002.
- [22] R.E. Valdes-Perez, V. Pericliev, and F. Pereira. Concise, Intelligible, and Approximate Profiling of Multiple Classes. *International Journal of Human Computer Studies*, Vol. 53(3):pages 411–436, 2000.
- [23] J.J. Wyrick, F.C. Holstege, E.G. Jennings, H.C. Causton, D. Shore, M. Grunstein, E.S. Lander, and R.A. Young. Chromosomal Landscape of Nucleosome-Dependent Gene Expression and Silencing in Yeast. *Nature*, Vol. 402:pages 418–421, 1999.
- [24] M. Zaki. Generating Non-Redundant Association Rules. In *Proceedings of the Sixth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD’99)*, pages 34–43. ACM Press, 2000. Boston, MA.